

### TECHNICAL SPECIFICATIONS

Maker	Contatti Srl
Model Name	EcoEasyLed High Bay
Voltage	AC 220/240V
Frequency	50/60 Hz
Type	LED
On/Off cycles	20.000 (30 sec on/off)
Operating temperature	-20°C / +50°C
Average lifetime	50.000 hours
Color temperature	6.500K +/- 300K
CRI Color Rendering Index	>80
Power Factor	•0.95




CRI Color Rendering Index

>80


### DIMENSIONAL DRAWING



Parabola con angolo da 120°

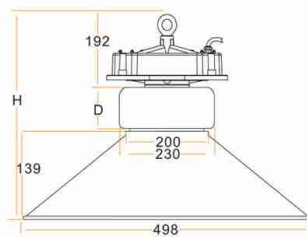

Parabola con angolo da 60°




EcoEasyLed	Con angolo da 120°		
	120 W	160 W	200 W
D (mm)	130	165	205
H (mm)	461	496	536

WATTAGE Lm @6.500K


<b>120W</b>	<b>12.000 lumen</b>
<b>120W Super</b>	<b>16.800 lumen</b>
<b>160W</b>	<b>16.000 lumen</b>
<b>160W Super</b>	<b>22.400 lumen</b>
<b>200W</b>	<b>20.000 lumen</b>
<b>200W Super</b>	<b>28.000 lumen</b>

EcoEasyLed	Con angolo da 60°		
	120 W	160 W	200 W
D (mm)	130	165	205
H (mm)	563	598	638

Color Temperature




Contatti Energia Srl  
EcoEasyLed

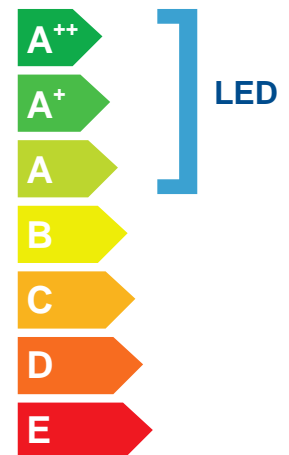

\*120 kWh/1000h

### PACKAGE

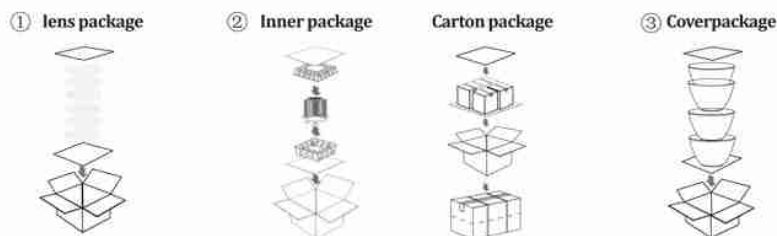

Item	Packing	Inner box size (mm)	Inner box G.W.	Outer carton size (mm)	Outer carton G.W.
Lens	1 pcs per inner box, / 12 inner box per outer carton	215*195*167	1.0kg	215*195*167	12.5kg
PC80 Cover	4 pcs per inner box, / 1 inner box per outer carton	413*413*273	0.95kg	440*440*500	5.2kg
AL60 Cover	4 pcs per inner box, / 1 inner box per outer carton	420*420*241	0.55kg	535*535*360	3.5kg
AL120 Cover	4 pcs per inner box, / 1 inner box per outer carton	498*498*139	0.45kg	535*535*230	3.4kg
80/100/120w high bay light	1 pcs per inner box, / 4 inner box per outer carton	300*270*345	5.5kg	615*555*345	22.8kg
160w high bay light	1 pcs per inner box, / 4 inner box per outer carton	300*270*380	6.1kg	615*555*410	25.5kg
200w high bay light	1 pcs per inner box, / 4 inner box per outer carton	300*270*420	6.5 kg	615*555*450	27 kg

BEAM ANGLE

