

PROFILO LINEARE


TECHNICAL SPECIFICATIONS

Maker	Contatti Srl
Model Name	EcoEasyLed Lineare
Voltage	AC 220/240V
Frequency	50/60 Hz
Type	LED
On/Off cycles	20.000 (30 sec on/off)
Operating temperature	-20°C / +50°C
Average lifetime	50.000 hours
Color temperature	4000K +/- 300K
CRI Color Rendering Index	>80

PICTURE




DIMENSIONAL DRAWING

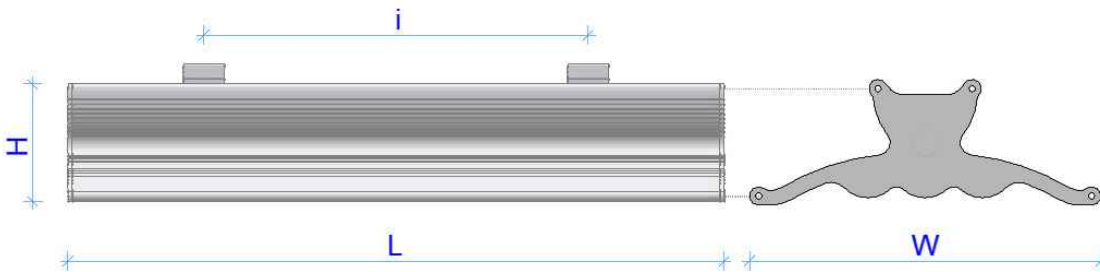


CRI Color Rendering Index

>80

Color Temperature





Contatti Energia Srl
EcoEasyLed

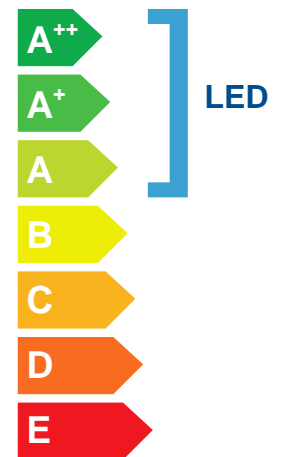

*48 kWh/1000h

L	W	H	i	WEIGHT	WATTAGE	Lm Output	kWh/1000h
30 cm	17,18 cm	6,14 cm	1 item	492 gr	1x6W	525 lumen	06
30 cm	17,18 cm	6,14 cm	1 item	492 gr	2x6W	1.050 lumen	12
30 cm	17,18 cm	6,14 cm	1 item	492 gr	3x6W	1.575 lumen	18
60 cm	17,18 cm	6,14 cm	40 cm	983 gr	1x12W	1.050 lumen	12
60 cm	17,18 cm	6,14 cm	40 cm	983 gr	2x12W	2.100 lumen	24
60 cm	17,18 cm	6,14 cm	40 cm	983 gr	3x12W	3.150 lumen	36
100 cm	17,18 cm	6,14 cm	60 cm	1.638 gr	1x16W	1.534 lumen	16
100 cm	17,18 cm	6,14 cm	60 cm	1.638 gr	2x16W	3.068 lumen	32
100 cm	17,18 cm	6,14 cm	60 cm	1.638 gr	3x16W	4.602 lumen	48
120 cm	17,18 cm	6,14 cm	80 cm	1.965 gr	1x20W	1.950 lumen	20
120 cm	17,18 cm	6,14 cm	80 cm	1.965 gr	2x20W	3.900 lumen	40
120 cm	17,18 cm	6,14 cm	80 cm	1.965 gr	3x20W	5.850 lumen	60
150 cm	17,18 cm	6,14 cm	90 cm	2.456 gr	1x24W	2.300 lumen	24
150 cm	17,18 cm	6,14 cm	90 cm	2.456 gr	*2x24W	4.600 lumen	48
150 cm	17,18 cm	6,14 cm	90 cm	2.456 gr	3x24W	6.900 lumen	72

LUX

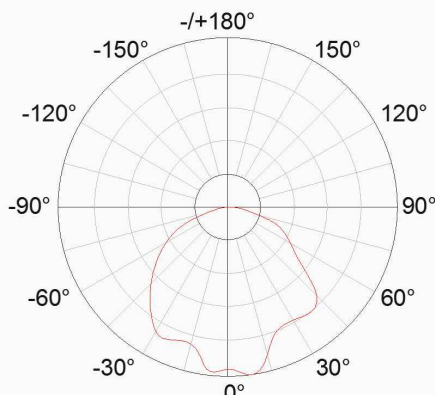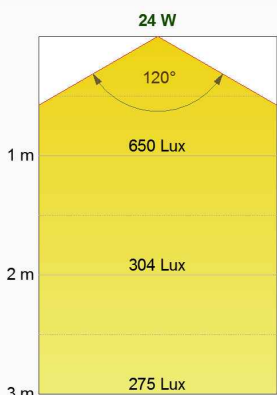

PACKAGING DETAILS (1 item)

L	W	H
152,00 cm	18,30 cm	6,40 cm

EPAL - PALLETTE EUR = 96 item

W	H	WEIGHT
120 cm	103 cm	270 kg



BEAM ANGLE

